


FLEX MOUNT BRACKET


for Detail Series On-Wall Speakers

BRACKET HARDWARE


WALL MOUNT KIT



Bracket Plate
2x



Swivel Mount (on each speaker)
2x

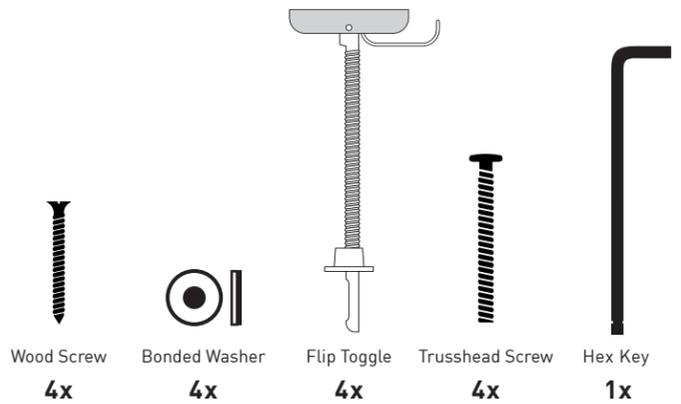

Wood Screw **4x** Bonded Washer **4x** Flip Toggle **4x** Trusshead Screw **4x** Hex Key **1x**

NOTE: Not all parts in the Wall Mount Kit will be used during install

FIGURE 1.

Check that **SWIVEL MOUNT** is already attached to back of each **DETAIL**.


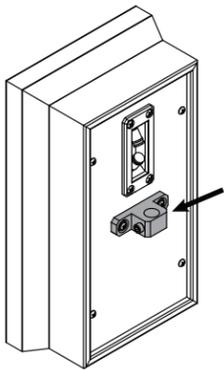


FIGURE 2.

Mount **BRACKET PLATE** to wall. Be sure to hit at least one stud with **WOOD SCREWS** or use **FLIP TOGGLES** and **TRUSS-HEAD SCREWS** in two locations on drywall.

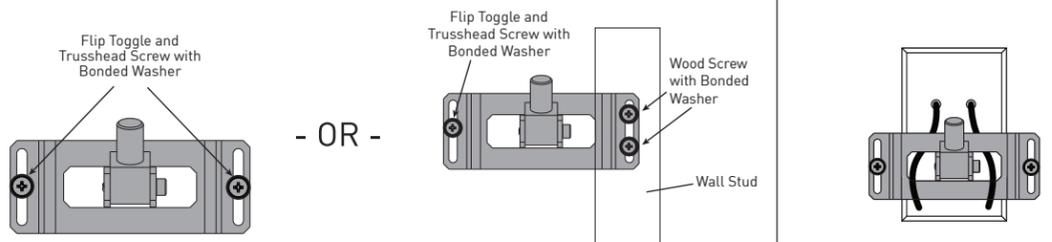

The **BRACKET PLATE** can mount over a wall plate. Speaker wires can thread through **BRACKET PLATE** holes.




FIGURE 4.

Connect wires and mount to wall by placing **SWIVEL MOUNT** on **BRACKET PLATE**


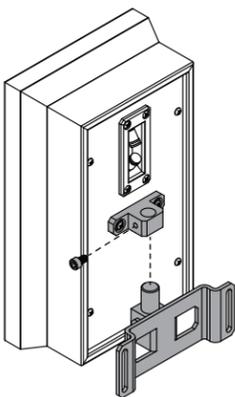


FIGURE 5.


To adjust vertical tilt, loosen set screw on **BRACKET PLATE**

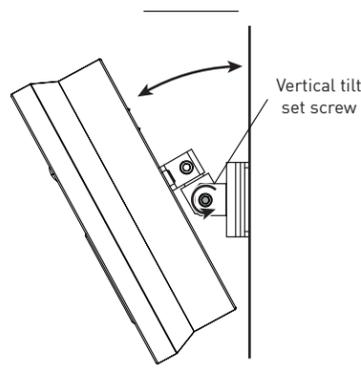

SIDE VIEW

FIGURE 6.

To adjust speaker horizontally, loosen set screw on **SWIVEL MOUNT**

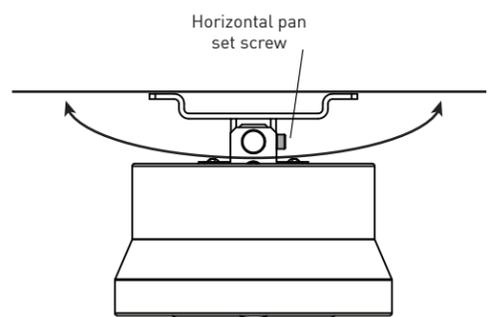

TOP VIEW

FOR ASSISTANCE, CALL: 1.888.213.5015 | MON-FRI 8AM-6PM EST